
Product data sheet



Geberit actuator plate Sigma70 for dual flush, for Sigma concealed cistern 12 cm

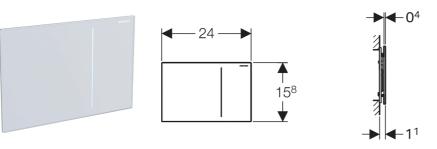

Application purposes

- · For flush actuation with Geberit Sigma concealed cisterns 12 cm
- · For flush actuation with high actuating convenience

Characteristics

- Front actuation
- Hydraulic servo lifter for minimum actuation forces
- Flush actuation pneumatic
- Can be installed without tools

Technical data

Flow pressure	1–6 bar
Actuation force	< 10 N

Scope of delivery

- · Hydraulic servo lifter
- Water supply connection set
- Protection plate
- Mounting frame
- 2 distance bolts
- Assembly parts

Article

Art. no.	Colour	Surface	Material designation	Coating
115.620.00.1	customised			without
115.620.FW.1		stainless steel brushed	Stainless steel	easy-to- clean
115.620.SI.1	white	glass	Glass	without
115.620.SJ.1	black	glass	Glass	without
115.620.SQ.1	umber	glass	Glass	without

Customised solution without inlay, must be sourced locally