


Geberit actuator plate Sigma70 for dual flush, for Sigma concealed cistern 8 cm

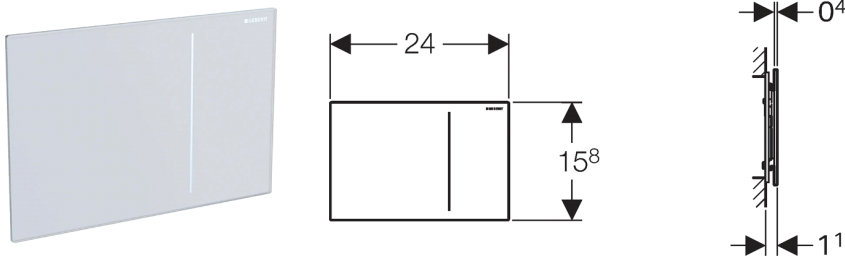

Application purposes

- For flush actuation with Geberit Sigma concealed cisterns 8 cm
- For flush actuation with high actuating convenience

Characteristics

- Front actuation
- Hydraulic servo lifter for minimum actuation forces
- Flush actuation pneumatic
- Can be installed without tools

Technical data

| | |
|-----------------|---------|
| Flow pressure | 1–6 bar |
| Actuation force | < 10 N |

Scope of delivery

- Hydraulic servo lifter
- Water supply connection set
- Protection plate
- Mounting frame
- 2 distance bolts
- Assembly parts

Article

| Art. no. | Colour | Surface | Material designation | Coating |
|--------------|------------|-------------------------|----------------------|---------------|
| 115.625.00.1 | customised | | | |
| 115.625.FW.1 | | stainless steel brushed | Stainless steel | easy-to-clean |
| 115.625.SI.1 | white | glass | Glass | without |
| 115.625.SJ.1 | black | glass | Glass | without |
| 115.625.SQ.1 | umber | glass | Glass | without |

i Customised solution without inlay, must be sourced locally