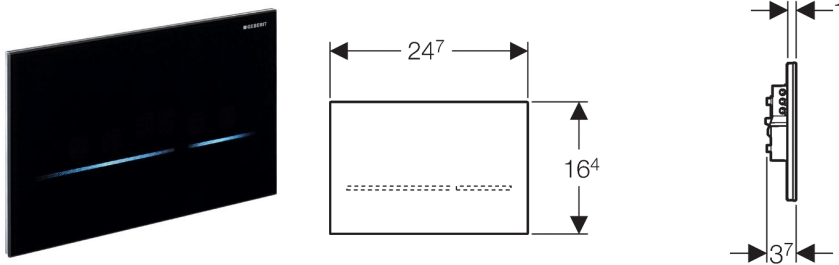


**Geberit WC flush control with electronic flush actuation, mains operation, dual flush, actuator plate Sigma80, touchless**

**Application purposes**

- For private and semi-public areas
- For releasing a dual flush
- For solid and drywall construction
- For Geberit Sigma concealed cisterns 8 cm, series 2016
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

**Characteristics**

- Flush actuation possible via external push-button
- Actuator plate without mechanical buttons
- Actuator buttons identifiable by light bars
- Button illumination activated when approached
- Button illumination can be set in five colours
- Orientation light can be activated
- Transformation of mains voltage to extra-low voltage, 4.1 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Flush actuation can be manually deactivated for cleaning
- Adjustable interval flush
- Pre-flush can be set
- Minimum detection time can be set
- Compatible with Geberit Service Handy
- Functions can be set and queried with the Geberit Service Handy
- Lockable

**Technical data**

Protection degree	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.1 V DC

**Scope of delivery**

- Actuator plate Sigma80
- Mounting frame
- Support block with servomotor and lifting device, pre-mounted
- Actuator rod
- Fastening material

**Excluded:**

- Installation set for Geberit WC flush controls with electronic flush actuation

## Article

<b>Art. no.</b>	<b>Colour</b>	<b>Surface</b>
<b>116.092.SG.1</b>	black	glass
<b>116.092.SM.1</b>		glass, reflective

- ⓘ Not compatible with art. no. 109.771.00.1, 111.726.00.1 and 110.772.00.1 (for the mentioned articles order art. no. 116.091.xx.1)